



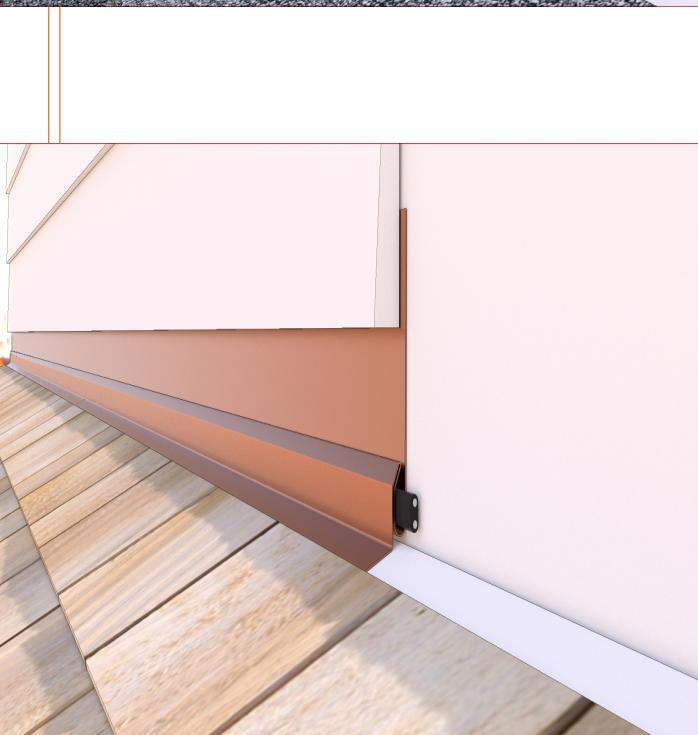

DATA SHEET

for HotFlashing PRO™



HotFlashing PRO™ is a special re-design of an existing flashing design used in the construction/building/roofing industry. Since roof to wall or wall to roof are problematic areas on a roof structure in medium and high snow load regions. We designed a raceways to securely hold heat trace cable in place to provide adequate heat transfer throughout a roof to wall or wall to roof area to prevent ice dams and glacier type ice build-up which damages walls from developing. Special design features for this product which do not currently exists in the marketplace are, (1) a special bend in an existing material/product used in the building/construction/roofing industry to create a raceway to securely hold a heat trace cable in place to effectively maintain a melt path for snow melt water, (2) the heat trace cable is partially visible for maintenance, inspections and replacement to conform to the NEC (National Electrical Code) Article 426, (3) it takes and existing recognized and widely used product and substantially improves it.

EXCLUSIVE FEATURES

SIMPLE & FAST INSTALLATION: Simple design installs easily on all new construction.

NEC Compliant: The engineered open raceway design conforms to the NEC (National Electrical Code) Article 426 and provides access for insertion, inspection and replacement.


WARRANTY: Industry leading 20-year limited warranty on metal product and a 10-year limited warranty against heat cable failures and manufacture defects assures a long service. Heat trace cable is protected from UV light and snow/ice shifts and slides.

COLOR MATCH: Our expansive inventory and nationwide network allows HotEdge to best match existing roof or trim color.



DATA SHEET

for HotFlashing PRO™



SPECIFICATIONS

MATERIAL SELECTION:

.021" copper or 50,000 psi galvanized steel (24 gauge), or .032 aluminum

COLOR:

Available in 16 stock colors using a Siliconized Modified Polyester (SMP) paint system or in natural copper.

DIMENSIONS:

5' or 10' lengths

HEATING SYSTEM:

Commercial grade self-regulating heat cable, UL Approved for roof and gutter deicing. Wattage required dependent on product(s) specified for project.

COMPONENTS:

HotFlashing PRO, commercial-grade self-regulating UL-approved for roof and gutter deicing heat cable.

ELECTRICAL REQUIREMENTS: 120VAC, or 208-277VAC. NEC Article 426.28 requires 30mA ground fault circuit protection for roof ice melting systems.

ELECTRICAL REQUIREMENTS:

120VAC, or 208-277VAC. NEC Article 426.28 requires 30mA ground fault circuit protection for roof ice melting systems.