


ASE-DS-8C & DS-9C, recommended settings for HotEdge systems operations.

The ASE-CDP-2 is recommend for system monitoring and manual operation.

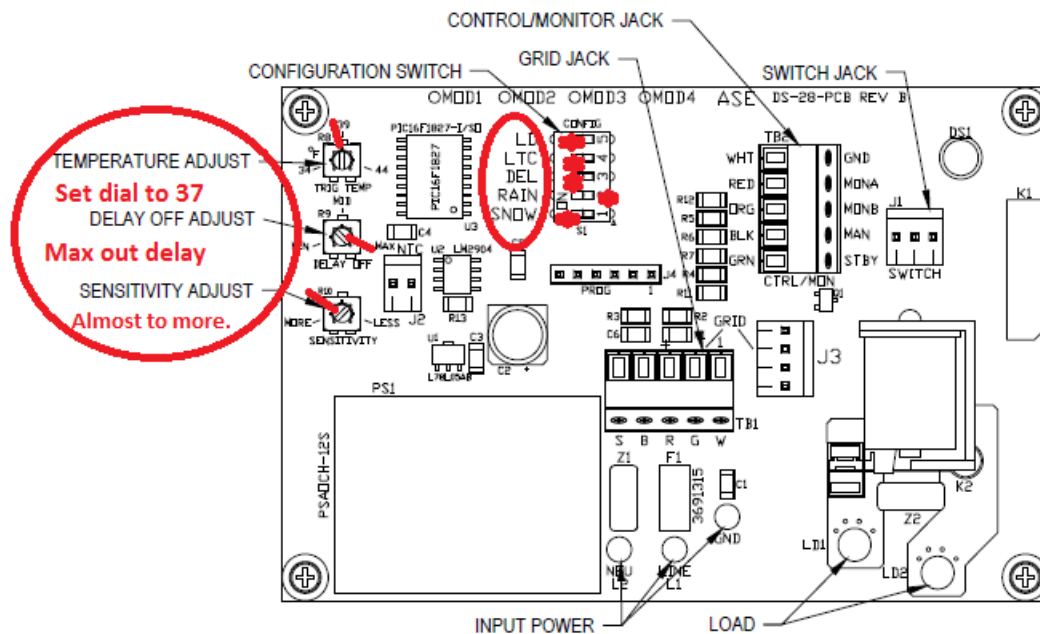

**ALWAYS FOLLOW LOCAL AND NATIONAL ELECTRICAL CODES
TOUJOURS SUIVRE LES CODES ÉLECTRIQUES LOCAUX ET NATIONAUX**

These settings are only recommendations. Consult with your HotEdge representative for customized settings.